

CS5

FULL RANGE CEILING SPEAKER



- 5" Full-Range 52Ω Speaker
- Exceptional Voive & Music Reproduction
- Powering Mode: Full Range Passive
- For Permanent Installation

Product Information

CS5 is designed for speech and music reproduction. The main features that countersign this product are: 130 mm (5") double cone driver with powerproofed membrane to exponential profile, low distortion, extremely linear frequency response in vocal range, elevated dispersion, coated painted steel grille, easy fixing with soft torsion in box steel for ceiling. CS5 uses high level impedance speaker (52Ω nominal). This allows the parallel connection on the same line for a maximum of 12 ceiling speakers without transformers and constant voltage amplifiers.

Data Sheet

Frequency Response	±5 dB 120 Hz ~ 18 KHz -10 dB 100 Hz
Sensitivity (1 Watt @ 1 m) Max SPL Calculated	93 dB 105 dB
Nominal Input Impedance (Ω)	52 Ω
Power Handling (Watts Cont. AES) Peak Power	20 W 80 W
Nominal Dispersion (@ -6 dB)	100° (H) x 100° (V)
Dimensions mm (±1 mm) (H x D)	202.5 x 67
Weight	1.1 Kg

Enclosure Material


- Plastic Baffle, Metal Driver Chassis, Metal Grille
- Finish: White or Black
- Connectors: Fastens

FRONT



20.25 cm

SIDE

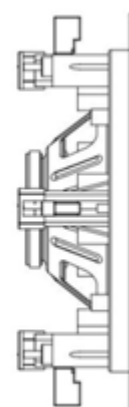

6.7 cm

INSTALL | EVENTS